

Fig No:GBF-2500 2"~ 8"
DN50~DN200

Features:


- Conical seat design
- Round Bonnet with Integral York.
- Outside Screw and Yoke, Rising stem design
- Seat face stellited, ground and lapped to a mirror finish, conical seat machined to 8 RMS
- Universal Trim-13 Cr stem, wedge 13 Cr face and stellited seat API Trim 8 suitable for applications up to 850°F (454°C)
- Body and Bonnet joint accurately machined, Full enclosed gasket

Sample Castings:

Before castings are released for production, the Modentic NDE inspector level, evaluates and approves the submitted x-ray films (100% coverage) as per ASME B16.34 acceptance standard. Improves the internal integrity of castings (RT level 2 or better) at pattern approval.

Standard compliance:

- Valve design according to BS 1873
- Shell wall Thickness according to BS 1873
- Pressure-temperature rating according to ASME/ANSI B16.34
- Material according to ASTM
- Face to Face according to ASME/ANSI B16.10
- End to end according to ASME/ANSI B16.10
- Flanged dimension according to ASME/ANSI B16.5 class 2500 RF, Finish 125-250 AARH
- Butt weld dimension according to ASME/ANSI B16.25
- Pressure testing according to API 598

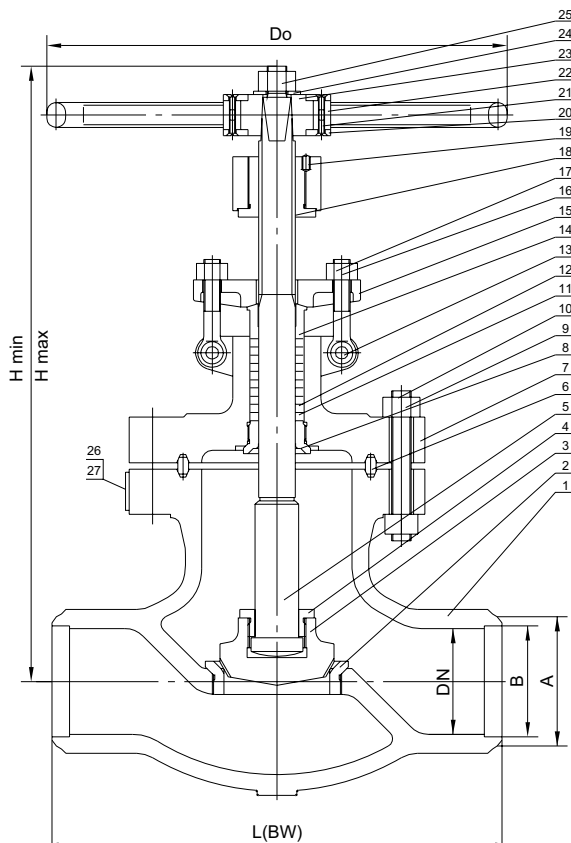

MATERIAL LIST

NO	PART NAME	MATERIAL
1	BODY	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105+ HF Faced
3	DISC	ASTM A105 +410 Faced
4	DISC NUT	ASTM A276-420
5	Stem	ASTM A182-F6
6	Gasket	ASTM Ring Joint-Soft Lron
7	Bonnet	ASTM A216-WCB
8	Back Seat	ASTM A276-410
9	Bolt	ASTM A193-B7
10	Nut	ASTM A194-2H
11	Packing	Flexible Graphite
12	Packing	Braided Graphite
13	Pin	CARBON STEEL
14	Gland	ASTM A26-410
15	Gland Flange	ASTM216-WCB
16	Eyebolt	ASTM A193-B7
17	Nut	ASTM A193-B7
18	Stem Nut	ASTM A439-D2
19	Screw	CARBON STEEL
20	Apron Plate	CARBON STEEL
21	Screw	CARBON STEEL
22	Handweel	ASTM A536(60-40-18)
23	Impact Plate	CARBON STEEL
24	Washer	CARBON STEEL
25	Handweel Nut	ASTM A194-2H
26	Name plate	304
27	Rivet	304

Other Materials Also Available On Requested

DIMENSIONS

unit:mm

SIZE	L	H	W
2"	451	520	400
3"	578	580	*
4"	673	645	*
6"	914	1080	*
8"	1022	1120	*

*Gear Operated